Embedded Solutions

A10 - 6U VMEbus Single-Board Computer

- **MC68060/50MHz + MC68360/25MHz**
- **Downward-compatible with A9**
- **1-slot VMEbus master or slave**
- **EL/LCD/CRT graphics**
- **48MB DRAM, 8MB Flash, 2MB SRAM**
- **10Mbit Ethernet**
- **4 COMs, SCSI, PCMCIA, CAN**
- **4 M-Module™ slots**
- **4 additional local M-Module™ slots with A8EXT**

The A10 CPU board combines workstation characteristics with embedded control capabilities and industrial requirements.

The A10 with the high-end MC68060 CPU, including MMU and FPU, is MEN's top dual-processor 68K industrial single-board real-time workstation. It is fully hardware and software compatible with the A9, capping the family's scalable performance at well over 100 MIPS.

Because of full compatibility between A9 and A10, a single processor family (and a single BSP) can be used many places in a system.

Major SBC components are part of the design story: the powerful 32-bit processor(s), DRAM, SRAM and Flash memory, multiple serial and mass storage interfaces, graphics and Ethernet, making the A10 fully functional VME CPU card. The other part, the many features often required for hard industrial applications, are also provided on the card: including PC-card carrier, CAN bus interface, timers, RTC, watchdog, temperature sensors, and DRAM parity.

Four M-Modules™ providing flexible industrial I/O extension can be mounted on the same double Eurocard, and can be accessed without hitting the VMEbus.

The A10 single-board computer is partly compatible with the MVME172 and MVME177 boards by Motorola.

mikro elektronik
gmbh · nürnberg

Embedded Solutions

Technical Data

CPU
- A9: 32-bit CPU MC68040/25MHz
  - 22 MIPS
- A10: 32-bit CPU MC68060/50MHz
  - Superscalar processor with two integer units
  - Over 100 MIPS

Peripheral Controller
- MC68360/25MHz I/O RISC processor

M-Module™ Extension
- 4 M-Module™ slots (requires additional VMEbus slot)
- Characteristics: A08, A24, D16, D32, INTA, INTC
- DMA16, DMA32 on slot 1

VMEbus
- 6U VMEbus form factor
- VMEbus master/slave interface
  - VIC068
  - Interrupter
  - Interrupt handler
  - A16, A24, A32, D16, D32
  - VMEbus slot-1 functionality

Memory
- Up to 2MB boot EPROM, 16-bit data bus
- Up to 32 MB DRAM
  - 1 JEDEC SIMM module
  - 32-bit data bus
  - 4-bit parity
  - Burst access
- Up to 16MB VMEbus-shared DRAM, permanently soldered
- Up to 8MB Flash
  - 32-bit data bus
  - On-board programming
- Up to 2MB SRAM, battery-backed via VMEbus
  - 4 SMD places (JEDEC)
  - 32-bit data bus (128KB/512KB/2MB steps)

Interfaces
- 2 SMC UARTs (debug)
  - RS232 interfaces
  - 9-pin D-Sub connector
- 1 SCC intelligent serial interface
  - Keyboard/mouse PC/AT compatible
  - Two 6-pin DIN connectors
- 2 SCC intelligent serial interfaces
  - 6-wire interfaces
  - Physical interface using SA-Adapter™ via 10-pin plug connector
  - RS232..RS485, isolated or not: for free use in system (cable to front or back)
- Ethernet controller
  - CPM of the MC68360
  - Local DMA
  - AUI, Twisted Pair or Cheapernet through interface adapter
- Memory card interface
  - Disk-like interface
  - JEIDA/PCMCIA
  - On-board card slot unit
- CAN bus interface
  - ISO High-Speed
  - Optically isolated via adapter on P2
- SCSI-2 interface
  - Local DMA
  - Connection via P2

Graphics Controller
- CL-GD6440 from Cirrus Logic
  - LCD/EL/CRT display
  - 32-bit data bus
  - Resolution up to 1024x768 dots with 256 colors
  - Linear memory addressing, packed pixel mode
  - 1MB frame buffer RAM
  - VGA connector at front panel
  - LCD/EL connector via P2

Miscellaneous
- Analog touch-screen interface via P2
- D/A converter for controlling the display contrast voltage (on adapter card via P2)
- Battery-backed real-time clock
- 4 general-purpose timers
- EEPROM (256x16) for setup
- Hex switch
- 16 LEDs
- Reset and abort switches
- Programmable watchdog
- Temperature measurement
- Single 5V supply

Electrical Specifications
- Power requirements (no M-Modules™, no display):
  - +5V, 3A typ., 5A max.
  - +12V, 0.1A typ., 1A max.
  - -12V, 20mA typ., 0.1A max.
- Power consumption: 17W typ.
- Isolation voltage for Ethernet/CAN bus: 500V DC
- MTBF:
  - A9/A10: 35,000h @ 50°C
  - A8-EXT: 52,000h @ 50°C

Mechanical Specifications
- Dimensions: standard double Eurocard, 233.3mm x 160mm
- Weight (no M-Modules™/Ethernet/SA-Adapter™):
  - A9: 464g
  - A10: 464g
  - A8-EXT: 222g

Embedded Solutions

Technical Data

Environmental Specifications

- Temperature range (operation):
  - 0..+60°C
  - Industrial temperature range on request
  - Airflow: min. 10m³/h
- Temperature range (storage): -40..+85°C
- Relative humidity range (operation): max. 95% non-condensing
- Relative humidity range (storage): max. 95% non-condensing
- Altitude: -300m to + 3,000m
- Shock: 15g/0.33ms, 6g/6ms
- Vibration: 1g/5..2,000Hz

Safety

- PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers

EMC

- Tested according to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst) with regard to CE conformity

Software Support

- MENMON™
- VxWorks®
- OS-9®

Embedded Solutions

Diagram

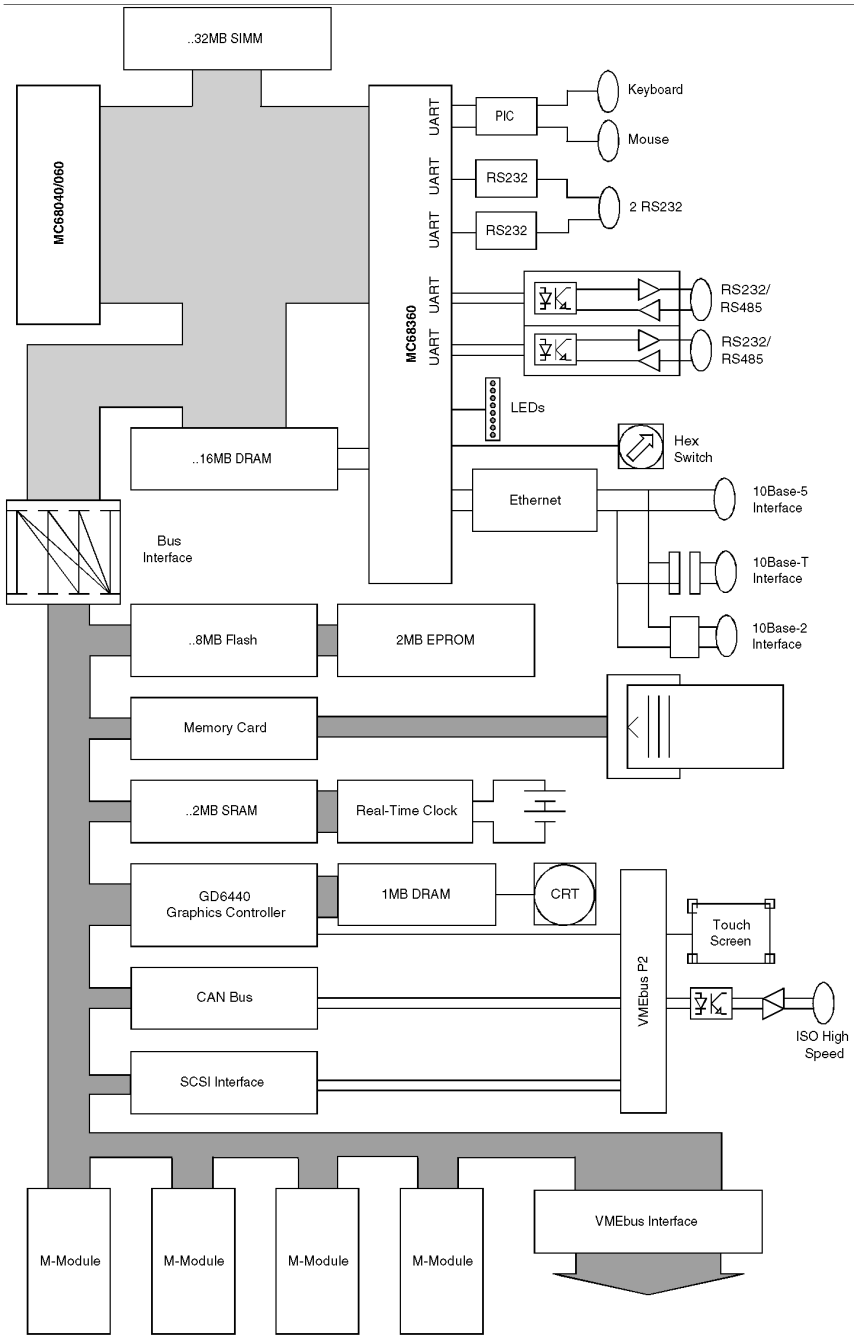

mikro elektronik
gmbh • nürnberg

Related Products

Standard Hardware

01A008E00	M-Module™ extension board for A8/A9/A10, with P2, 0...+60°C
01A009-00	CPU 68040/25MHz and CPU 68360/25 MHz, 16MB DRAM, 0.5MB SRAM, with graphics, 0..+60°C
01A009-01	CPU 68040/25MHz and CPU 68360/25 MHz, 16MB DRAM, 0.5MB SRAM, without graphics, 0..+60°C
01A010-00	CPU 68060/50MHz and CPU 68360/25 MHz, 16MB DRAM, 0.5MB SRAM, with graphics, 0..+60°C
01A010-01	CPU 68060/50MHz and CPU 68360/25 MHz, 16MB DRAM, 0.5MB SRAM, without graphics, 0..+60°C

The A10 is partly compatible with the MVME172 board by Motorola. You can download the corresponding compare chart from MEN's website.

The A10 is partly compatible with the MVME177 board by Motorola. You can download the corresponding compare chart from MEN's website.

Please refer to our 6U VMEbus compare chart for a selection of further single-board computers with different processors and on-board functionality.

SA-Adapters

08SA01-00	RS232, not optically isolated, 0..+60°C
08SA02-00	RS422/485, half duplex, optically isolated, 0..+60°C
08SA02-01	RS422/485, full duplex, optically isolated, 0..+60°C
08SA02-07	RS422/485, full duplex, optically isolated, -40..+85°C screened
08SA03-00	RS232, optically isolated, 0..+60°C
08SA03-01	RS232, optically isolated, -40..+85°C screened
08SA04-00	TTY, optically isolated, 0..+60°C

Accessories

05A008-02	A9, A10 M-Module™ mounting kit for 4 M-Modules™, 1 additional 1-slot front panel, 4 60-pin contact strips
05A008-03	SA-Adapter™ on M-Module™ mounting kit for A9/A10
05A008-12	Accessory A9/A10: 1-slot front panel for 2 SA adapters
05M000-01	M-Module™ cable, 2m, 21-pin VG receptacle to pig tail, for connection to VMEbus P2 mating connector (05M000-02), for wiring of M-Module™ I/O signals via P2

Related Products

05M000-15	Front-panel cover for M-Module™ cut-outs at front panels, snap-in, 10 pcs
08AD19-00	Adapter A8/B8 family: Ethernet AUI
08AD20-00	Adapter A8/B8 family: Cheapernet
08AD21-00	Adapter A8 family: Twisted Pair
08AD22-00	Adapter A8 family: P2 adapter with SCSI-2
08AD23-00	Adapter A8 family: P2 adapter with SCSI-2 and CAN
08AD23-01	Adapter A8 family: P2 adapter with SCSI-2, CAN and graphics (LCD, touch screen, contrast voltage)
08AD44-00	DRAM SIMM module, 32MB, fast-page mode, 60ns
08AD44-01	DRAM SIMM module, 16MB, fast-page mode, 60ns

For more functions realized with SA adapters, see the listing on MEN's website. You can also view our SA adapter compare chart for a quick overview of different functions. Please contact sales to make sure that these SA adapters can be used in the board configuration you are looking for.

Systems & Card Cages

Disk drives for basic systems are delivered as requested. Different rack sizes, power supplies and backplanes on request.

0700-0006	CE-conforming housing for VMEbus 6U: closed 19" rack, 5U, 7 slots, J1+2 backplane (not VME64), power supply 230V, fan incl. power cable no. 6080-0020

Software

10ABMX-07	OS-9® V.3.0: OS-9®/68k + NET license
10A009-62	VxWorks® V.5.4/Tornado® 2.0 standard BSP for A9/A9L/A10
10A010-01	OS-9® V.3.0: BSP for A10 (object code, MEN)

VxWorks® software for this MEN board is available from WindRiver Systems. This does not imply that the complete board functions have been tested in this environment, nor that specific MEN BSP or driver packages are available. If you don't find ordering numbers for additional VxWorks® BSP or driver packages provided or recommended by MEN, please contact sales.

For OS-9® BSP and driver support provided by MEN please refer to the ordering numbers below.

Documentation

20A008-00	A9/A10 user manual

For the most up-to-date ordering information and direct links to other data sheets and downloads, see the A10 online data sheet under » www.men.de.

Embedded Solutions

Contact Information

Germany
MEN Mikro Elektronik GmbH
Neuwieder Straße 5-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901
E-mail info@men.de
www.men.de

France
MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211
E-mail info@men-france.fr
www.men-france.fr

UK
MEN Micro Ltd
Whitehall, 75 School Lane
Hartford, Northwich
Cheshire UK, CW8 1PF
Phone +44 (0) 1606 781105
Fax +44 (0) 1606 784566
E-mail info@menmicro.co.uk
www.menmicro.co.uk

USA
MEN Micro, Inc.
PO Box 4160
Lago Vista, TX 78645-4160
Phone (512) 267-8883
Fax (512) 267-8803
E-mail sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue.
All brand or product names are trademarks or registered trademarks of their respective holders.
Information in this document has been carefully checked and is believed to be accurate as of the date of publication; however, no responsibility is assumed for inaccuracies. MEN Mikro Elektronik accepts no liability for consequential or incidental damages arising from the use of its products and reserves the right to make changes on the products herein without notice to improve reliability, function or design. MEN Mikro Elektronik does not assume any liability arising out of the application or use of the products described in this document.
The products of MEN Mikro Elektronik are not suited for use in nuclear reactors and for application in medical appliances used for therapeutical purposes. Application of MEN's products in such plants is only possible after the user has precisely specified the operation environment and after MEN Mikro Elektronik has consequently adapted and released the product.
Copyright © 2005 MEN Mikro Elektronik GmbH. All rights reserved.

mikro elektronik
gmbh • nürnberg